Oj







39

JAPANESE PATENT OFFICE

PATENT ABSTRACTS OF JAPAN

(43) Date of publication of application: 03.06.2004 2004156875 A (11) Publication number:

> F23G 5/44 (51) Int. CI

F23G 5/46, F23M 5/08, F23G 5/24, B09B 3/00,

F27D 1/12

2002324889 08.11.2002

(21) Application number:

(22) Date of filing:

F27B 1/22

(71) Applicant: KANGEN YOYU GIJUTSU KENKYUSHO:KK

KUME SHOICH (72) Inventor: or gas as the energy. Further the consumption of the refractory can be reduced by half in comparison with a

(54) WASTE DISPOSING SYSTEM


BEST AVAILABLE

(57) Abstract:

PROBLEM TO BE SOLVED: To solve a problem in a nace wherein the energy loss is great as a system utilizing the heat energy, and the cost is high even through the energy is recovered, which makes the conventional method utilizing the heat energy of a furcommercialization difficult. SOLUTION: In a cokes bad type furnace gasification fusion furnace, a pipe and a jacket are mounted on a furnace inner face of a shell and a furnace outer face of the shell in a case when the pipe and the jacket are not applied between the shell in the furnace and a refractory, or the refractory does not exist, and the water, oil or gas such as the air and nitrogen (N2) is allowed to pass therebetween, to utilize the heat of the liquid

conventional case, by adjusting the thermal loading. COPYRIGHT: (C)2004,JPO

file:///C/Documents%20and%20Settings/deeptid/Desktop/dl/JP24156875A2.htm (1 of 2) [8/18/2005 2:29:33 PM]

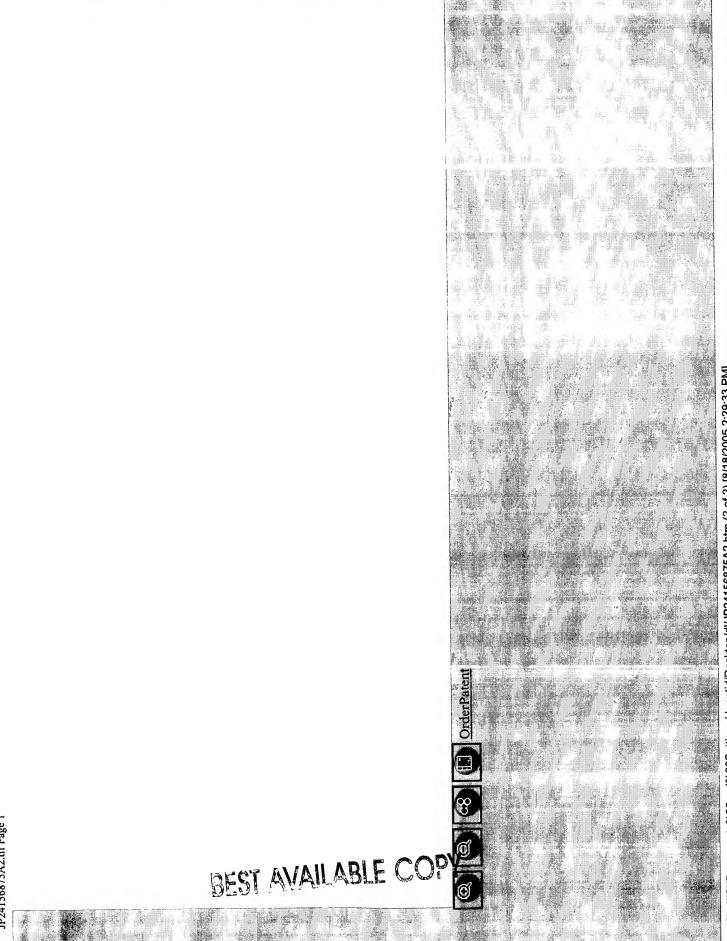

file:///C|/Documents%20and%20Settings/deeptid/Desktop/dl/JP24156875A2.htm (2 of 2) [8/18/2005 2:29:33 PM]